



QUALITY
ISO 9001:2015
NSAI Certified

COPYRIGHT AND OWNERSHIP OF THIS DRAWING IS RESERVED IN GARLAND, WHOSE PRIOR WRITTEN CONSENT IS REQUIRED FOR ITS REPRODUCTION AND PUBLICATION TO ANY THIRD PARTY.
ALL RIGHTS RESERVED BY THE LAW OF COPYRIGHT AND BY INTERNATIONAL COPYRIGHT CONVENTIONS ARE RESERVED TO GARLAND ©
NO PART OF THIS DOCUMENT MAY BE REPRODUCED OR TRANSMITTED IN ANY FORM OR STORED IN ANY RETRIEVAL SYSTEM OF ANY NATURE WITHOUT THE WRITTEN PERMISSION OF THE CONSULTING ENGINEER AS COPYRIGHT HOLDER EXCEPT AS AGREED FOR USE ON THE PROJECT FOR WHICH THE DOCUMENT WAS ORIGINALLY ISSUED.

- NOTES**
- DO NOT SCALE, USE FIGURED DIMENSIONS ONLY.
 - THIS DRAWING IS TO BE READ IN CONJUNCTION WITH THE SPECIFICATIONS AND ALL RELEVANT ARCHITECTS AND SERVICES ENGINEERS DRAWINGS.
 - SETTING OUT TO ARCHITECTS DETAILS.
 - DRAWINGS SHALL BE CHECKED BY CONTRACTOR AND ANY DISCREPANCIES (DIMENSIONS) SHALL BE BROUGHT TO THE ATTENTION OF THE ENGINEER BEFORE WORK IS COMMENCED.
 - ALL WORKS TO BE IN COMPLIANCE WITH IRISH WATER CODE OF PRACTICE FOR WASTEWATER INFRASTRUCTURE AND WASTEWATER INFRASTRUCTURE STANDARD DETAILS.
 - ALL STORM AND FOUL PIPES TO BE UPVC STIFFNESS CLASS 8kN/m². FITTINGS SHALL COMPLY WITH THE PROVISIONS OF IS EN 1401 2006/2012.
 - TYPICAL SERVICE LAYOUT SEPARATION DISTANCES, HORIZONTALLY AND VERTICALLY, AS PER IRISH WATER DETAIL STD-WW-05.
 - IN LOCATIONS WHERE A SEWER LINE CROSSES OVER A WATERMAIN IS UNAVOIDABLE, JOINTS IN THE WATERMAIN SHALL NOT BE LOCATED DIRECTLY BELOW SURFACE WATER OR WASTEWATER SEWER CROSSINGS.
 - PIPE FALLS TO BE AS SPECIFIED, ILS AND CLS SUBJECT TO SITE REVIEW.
 - TEMPORARY PROPPING TO BE THE RESPONSIBILITY OF THE MAIN CONTRACTOR.
 - ALL STORMWATER & FOUL SEWERS WITHIN 300mm OF FINISHED GROUND FLOOR SLAB TO BE ENCASED IN MINIMUM 150mm C16/20 CONCRETE.
 - THE EXISTING SERVICES SHOWN ARE INDICATIVE BEFORE CONSTRUCTION WORK COMMENCES THE CONTRACTOR IS TO CAREFULLY LOCATE AND PROTECT ALL UNDERGROUND SERVICES IN AREAS OF PROPOSED WORKS, AS PER SERVICE PROVIDER'S GUIDANCE AND SPECIFICATION.
 - ALL DRAINAGE POP UP PIPES TO BE MIN Ø110mm.
 - ALL SEWERS WITHIN 1.20M OF FINISHED GROUND LEVEL TO HAVE CONCRETE SURROUND AS PER GARLAND SPECIFICATION
 - PROPOSED DRAINAGE CHANNEL WITH LOCKABLE COVERS TO HAVE GALVANISED RAIL WITH HEELSAFE (MAX. 6mm SLOTS) MINIMUM LOAD CLASS D400 TO BS EN 1433:2002. SYSTEM SHALL BE CERTIFIED TO BS EN 1433:2002 AND BS EN 124. JOINTS AS PER GARLAND AND MANUFACTURERS SPECIFICATIONS.

- LEGEND:**
- EXISTING FOUL SEWER (CONCRETE)
 - EXISTING FOUL RISING MAIN
 - PROPOSED FOUL SEWER (CONCRETE)
 - PROPOSED FOUL RISING MAIN (HDPE)

Licence No. CYAL50323377
© National Mapping Division of
Táille Éireann

3	02/11/23	SITE LAYOUT UPDATED AS PER LCC COMMENTS	JPH	TM	JPH	TM
2	31/10/23	SITE LAYOUT UPDATED AS PER LCC COMMENTS	JPH	TM	JPH	TM
1	23/10/23	SITE LAYOUT AND SERVICES UPDATED TO SUIT ARCHITECTS NEW LAYOUT	JPH	TM	JPH	TM
REV	DATE	DESCRIPTION	DRN	DES	CHK	APP

CLIENT:
LIMERICK CITY AND COUNTY COUNCIL

ARCHITECT:
HEALY & PARTNERS ARCHITECTS


GARLAND
DUBLIN LIMERICK WATERFORD INTERNATIONAL
T: +353 1 4964322 T: +353 01 319708 T: +353 01 878511 T: +353 01 319708
E: info@garlandconsultancy.com W: www.garlandconsultancy.com

PROJECT:
TOURISM AND LIMERICK GREENWAY PROJECTS

TITLE:
LIMERICK GREENWAY HUB AT ARDAGH
PROPOSED FOUL SERVICES LAYOUT

STATUS:
PLANNING APPLICATION

DRAWN: JPH	DES. BY: JPH
CHK BY: JPH	APP. BY: TM
DATE: 04/05/2023	JOB No:
A1 SCALE: 1:500	H1137
DRG. No:	REV.
H1137-DR-GAR-CE-1003	3

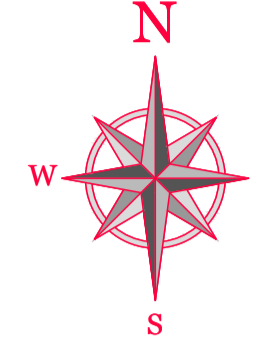

L:\11137\DRG\CE\H1137-DR-GAR-CE-1003-1004.dwg