


- Notes:
- All levels relate to OD Malin Head.
 - Do not scale from this drawing. If in doubt, ask.
 - This drawing is to be read in conjunction with all other drawings and specifications.
 - All pipework shall be Polypipe Ridgdrain pipework and fittings, or similar approved.
 - Proposed linear drainage channels to be Aco Multidrain channels with D400 Bosted covers to suit the architects proposed finished surface.
 - Proposed road gullies shall be Polypipe Ridgully with D400 Buffalo 100 ductile iron grating.
 - All pipes to have a minimum cover of 900mm in non-trafficable areas and 1.2m in trafficable areas.
 - All gully and linear drainage sump outlets to be 150mm diameter and to have sump for trapping silt.
 - All chamber covers to be rated D400 where located in trafficable areas and C250 elsewhere.
 - Refer to drawing MUN-ARUP-ZZ-ZZ-DR-C-0100 & MUN-ARUP-ZZ-ZZ-DR-C-0101 for typical drainage details.
 - Refer to drawing MUN-ARUP-ZZ-ZZ-DR-C-0021 for proposed manhole schedule.
 - Ordnance Survey Ireland Licence No. EN 00028210 Ordnance Survey Ireland/ Government of Ireland

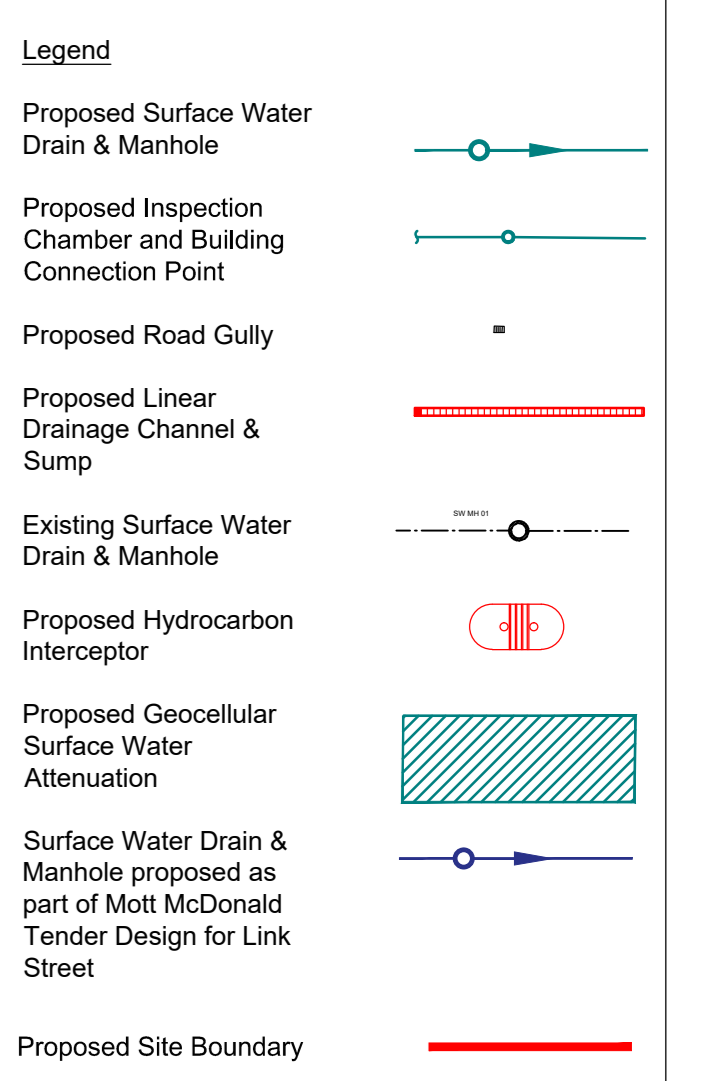

P01	20/01/21	ROD	RM	KG
Issued for Planning				
Rev	Date	By	Chk	Appd

ARUP
 Arup, Harcourt House,
 Upper Harcourt Street, Limerick
 Tel: +353 (0)11 212100
 www.arup.com

Client
Limerick City & County Council

Project Title
Mungret Residential Development, Mungret, Limerick

Drawing Title
Proposed Surface Water Layout

Scale of A0: 1:500
 Title: Civil Infrastructure
 Suitability: S2 - Suitable for Information
 Arup Job No: **261585-00** Rev: **P01**
 Name: **MUN-ARUP-ZZ-ZZ-DR-C-0020**